


SMG 턱무


TYPE															Approx Weight (kg)
GEAR RATIO	1/5	1/10	1/15	1/20	1/30	1/40	1/50	1/60	1/75	1/80	1/90	1/100	—	—	
RPM	360	180	120	90	60	45	36	30	24	22.5	20	18	—	—	



감속기 형번 (출력축)	THREE PHASE INDUCTION MOTOR SPEC										APPD BY	IL HWAN KIM	UNIT	mm	SUBJECT	SMG	Revision No.	0
	PH	P	kW	VOLTS	Hz	BEARING NO.	기동방식	절연종류	PRO- TEC- TION	RA- TING	CHKD BY	KEOAK HOON	SCALE	N/S	TITLE	OUT LINE		
22	3	4	0.4	220/380	60	6202/6202	직입기동	B 중	IP44	CONT.	DSND BY	LEE EUN HWA	PROJEC'N	3rd Angle	REF. NO	RATIO 1/5~1/100		
											DATE	2015.03.02	PAGE		DWG NO	F0220100T004A04N		

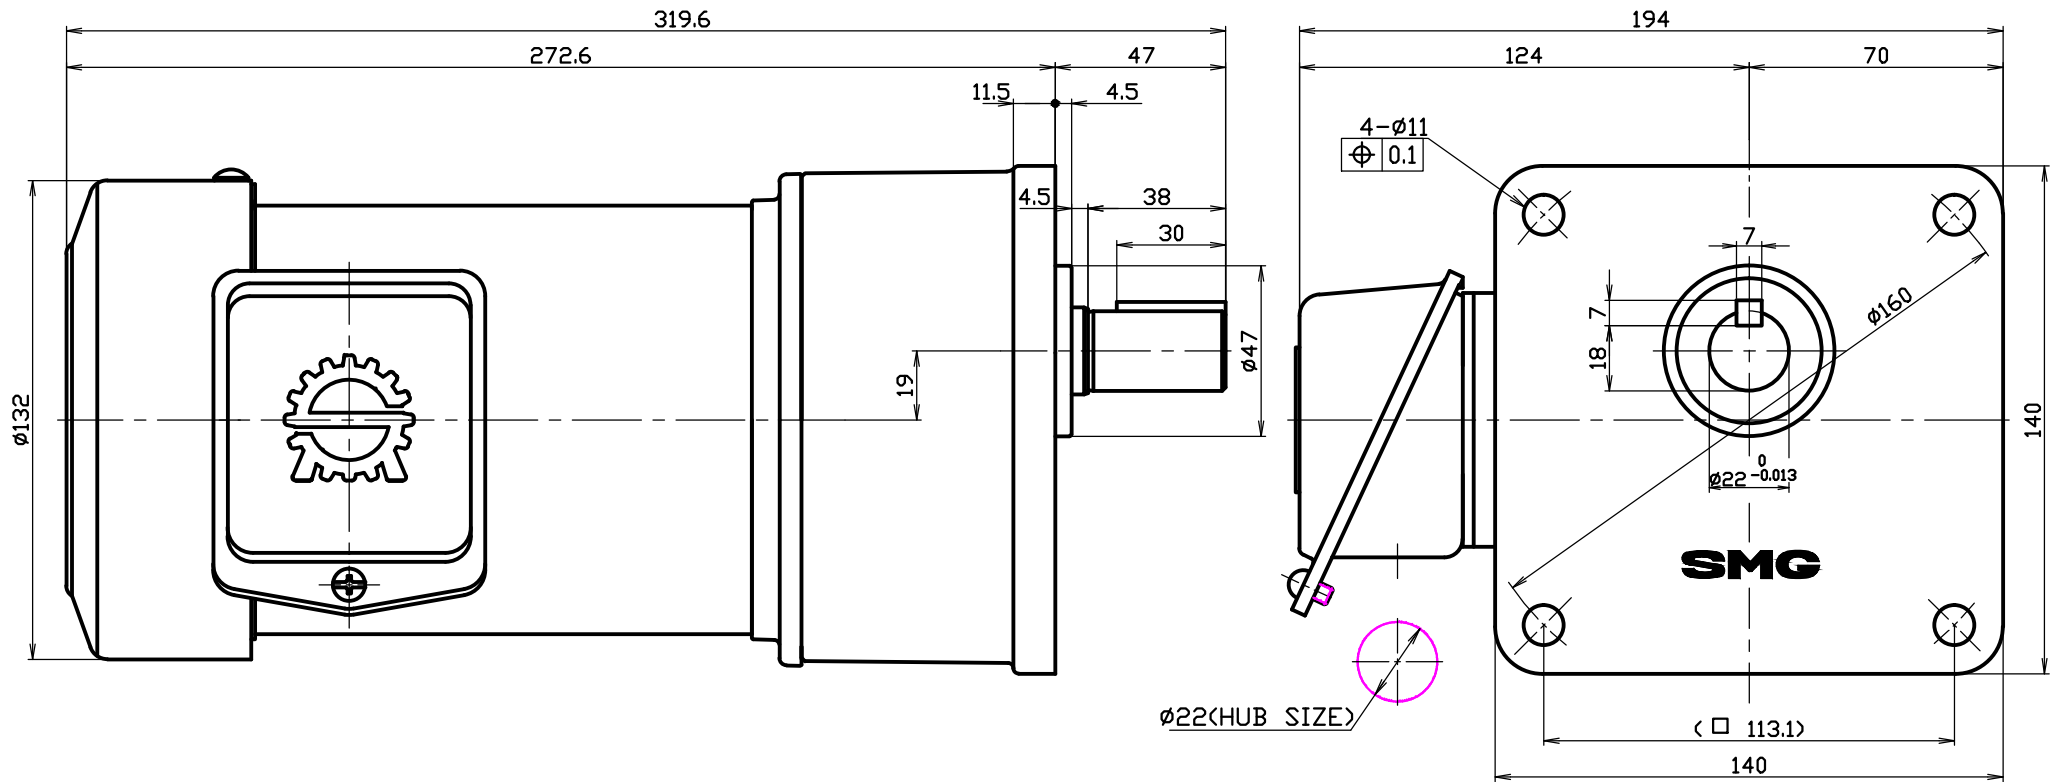

TYPE	SMG 턱유														Approx Weight (kg)
GEAR RATIO	1/5	1/10	1/15	1/20	1/30	1/40	1/50	1/60	1/75	1/80	1/90	1/100	—	—	16
RPM	360	180	120	90	60	45	36	30	24	22.5	20	18	—	—	

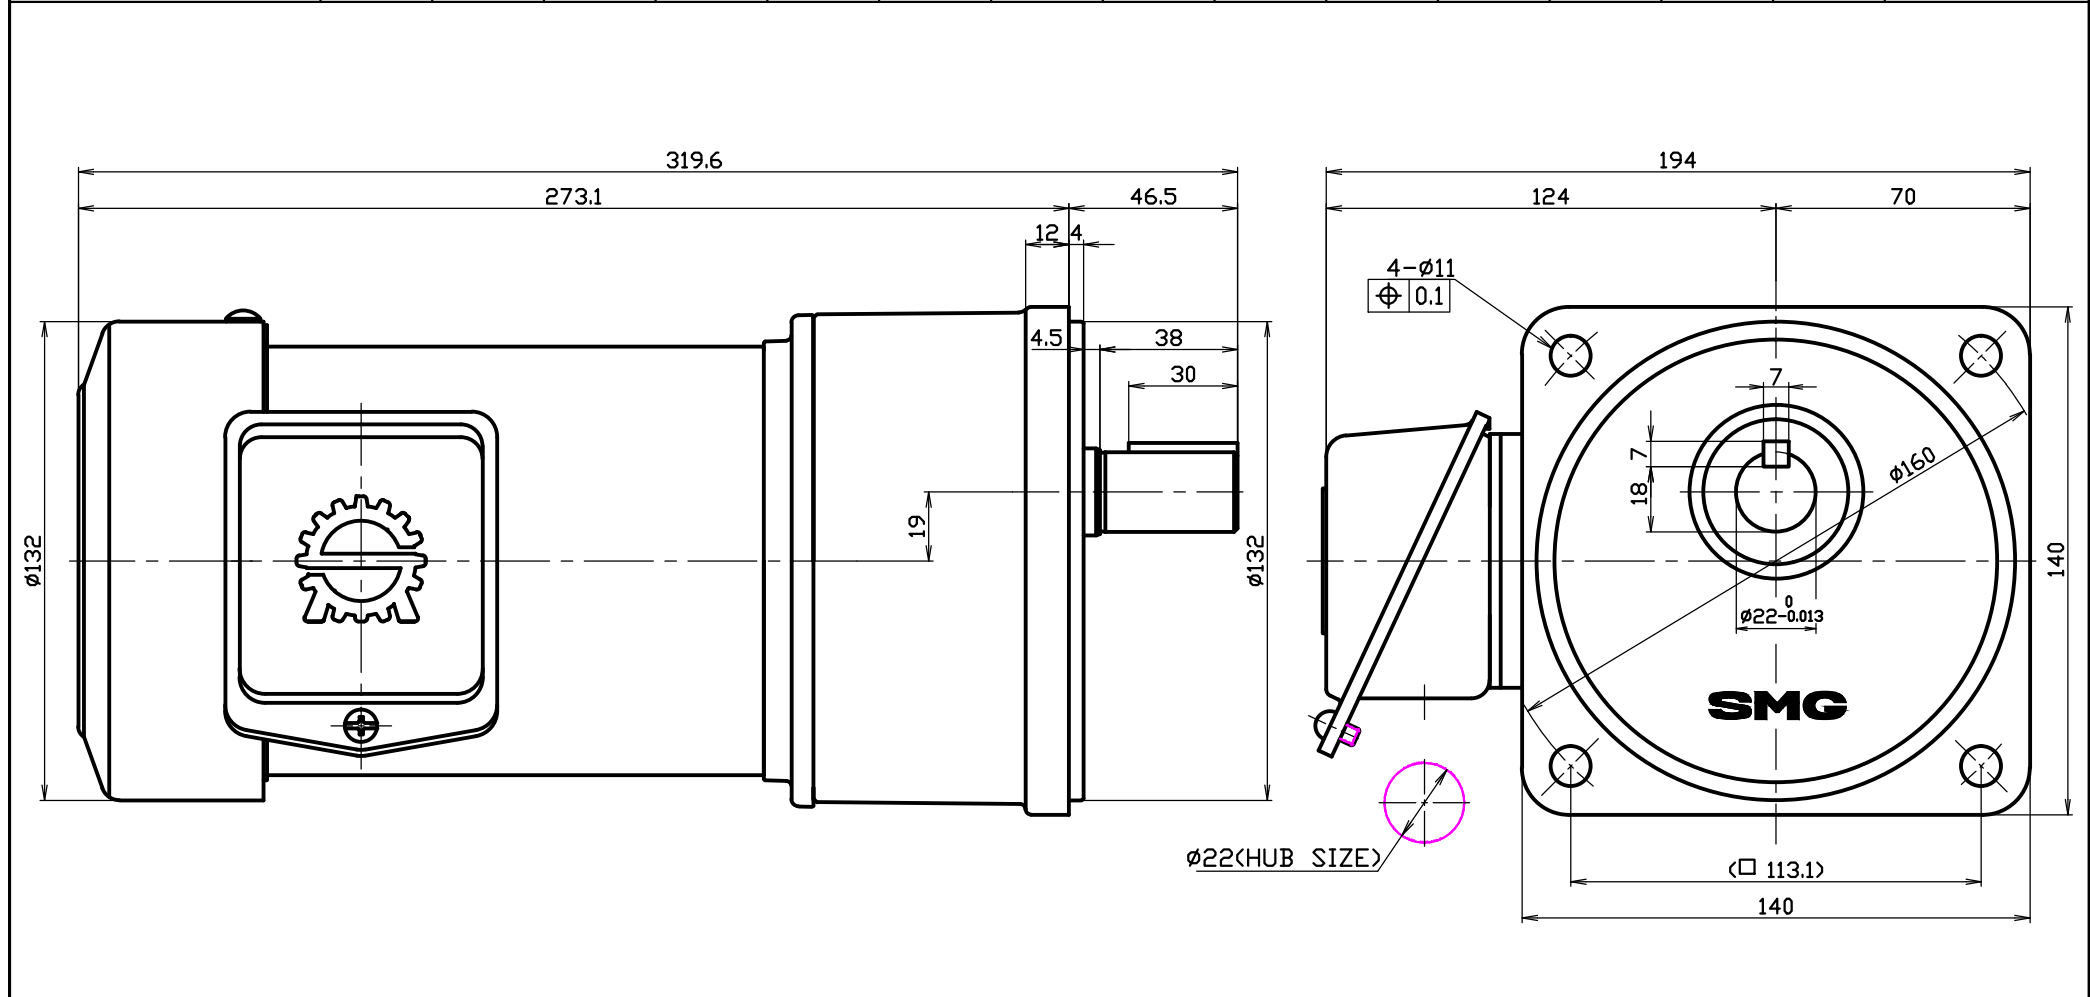

감속기 형번 (출력축)	THREE PHASE INDUCTION MOTOR SPEC										APPD BY	IL HWAN KIM	UNIT	mm	SUBJECT	SMG	Revision No.	0
	PH	P	kW	VOLTS	Hz	BEARING NO.	기동방식	절연종류	PRO- TEC- TION	RA- TING	CHKD BY	KEOAK HOON	SCALE	N/S	TITLE	OUT LINE		
22	3	4	0.4	220/380	60	6202/6202	직입기동	B 종	IP44	CONT.	DSND BY	LEE EUN HWA	PROJEC'N	3rd Angle	REF. NO	RATIO 1/5~1/100		
											DATE	2015.03.02	PAGE		DWG NO	F0220100T004A03N		