

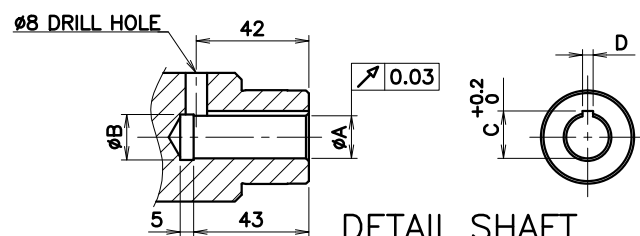


THREE PHASE INDUCTION MOTOR

TEFC

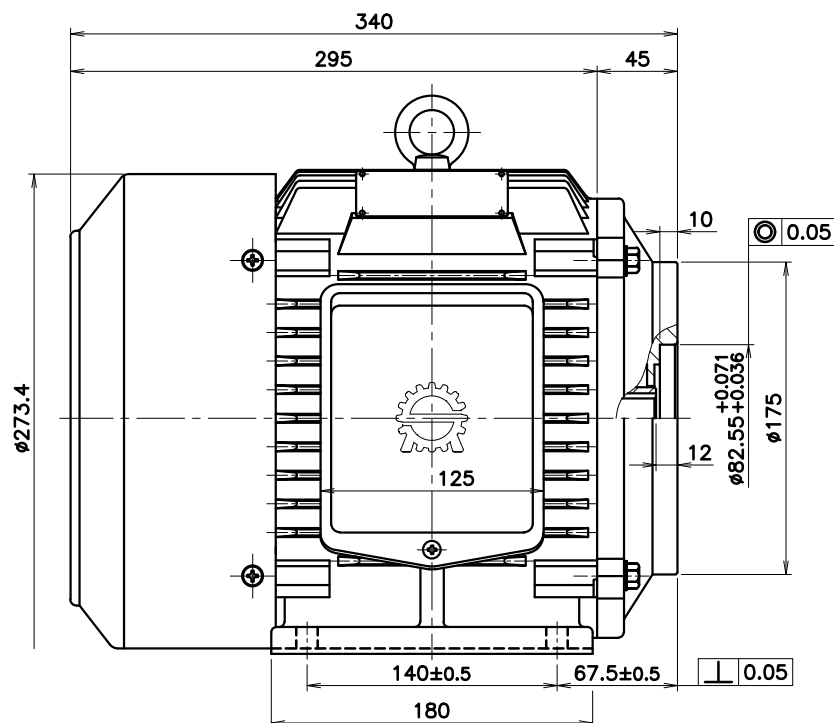


DETAIL SHAFT

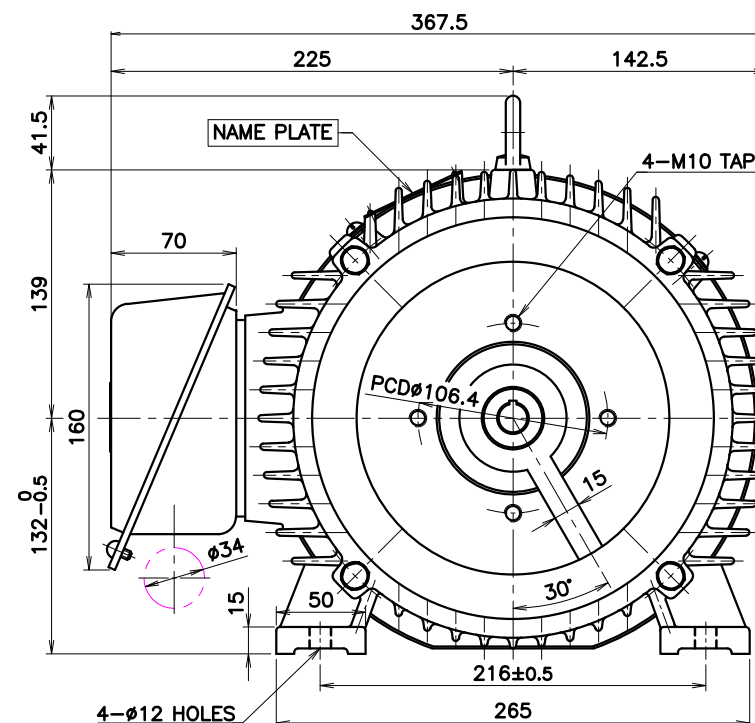

DIMENSION

ØA	ØB	C	D
Ø15.88 ^{+0.021} / ₀	Ø17	17.74	3.98 ^{+0.03} / _{+0.01}
Ø19.05 ^{+0.041} / _{+0.020}	Ø21	21.5	4.77 ^{+0.038} / _{+0.020}

FRAME NO.	OUTPUT (kW)	POLES	VOLTS	Hz	INS. CLASS	PRO-TEC-TION	RA-TING	BEARING NO.						APPROX WEIGHT(kg)			APPD BY	IL HWAN KIM	UNIT	mm	SUBJECT		Revision No.	
								2P		4P		6P/8P		2P	4P	6P/8P	CHKD BY	IL HWAN KIM	SCALE	N/S	TITLE OUT LINE			
								DRIVE	OPP.D.	DRIVE	OPP.D.	DRIVE	OPP.D.				DSND BY	KEOAK HOON	PROJEC'TN	3rd Angle				
																	DATE	2016.08.04	PAGE					
132S	5.5	4	220/380	60	B	IP44	CONT	-	-	6207ZZ	6306ZZ	-	-	-	-	-	 SMC SHINMYUNG ELECTRIC CO.,LTD		REF. NO	KBC TYPE				
																			DWG NO	TFC1320402B03N				